

E213 Series Industrial PC


Features

- Intel® Elkhart Lake platform J6412/N6210/X6425E
- Dual channel DDR4 up to 32GB
- 2 independent display via DP and HDMI
- 3 LAN (2 x Intel i210 support PoE, 1 x Intel i226)
- 1 RS-232/422/485, 1 RS-232
- 2 USB 3.0, 2 USB 2.0
- 2 Trigger, 2 Light Source
- 8 DI, 8 DO, 2 Encode
- Support UPS, 4G or 5G, Wi-Fi expansion
- DC 9-36V
- Dimensions: 172 x 125 x 62.5mm
- CE/FCC Class B, ESD 8KV/15KV
- Windows 10/11, centos 8, ubuntu 20.04/22.04


Specifications

Item	Sub-Items	E213 Series
Processor System	CPU	Intel® Elkhart Lake platform J6412/N6210/X6425E CPU
	TDP	12W Max
	BIOS	AMI 128Mbit SPI Flash
Memory	Technology	2 DDR4 SO-DIMM
	Max. Capacity	32 GB
Display	Controller	Intel Gen11 Graphics Engines (SoC integrated)
	Graphic Features	DX12, OGL4.5, OCL1.2, Vulkan 1.1, MPEG2, H.264, JPEG/MJPEG, H.265(HEVC)
External I/O	DP	1 x DP 1.4 up to 4096 x 2160 @ 60Hz
	HDMI	1 x HDMI 2.0b up to 4096 x 2160@60Hz
	Ethernet	2 x Intel i210 GbE LAN support PoE, 1 x Intel i226 2.5GbE LAN
	USB	2 x USB2.0, 2 x USB3.0
	Serial Port	COM1: RS-232/422/485, COM2: RS-232
	Trigger	2
	Light Source	2
	Encode	2
	DIO	8 x DI, 8 x DO
	Power DC Jack	Phoenix 4pin
Expansion	M.2 E-Key	1 x M.2 2230 support Wi-Fi (support PCIe)
	M.2 B-Key	1 x M.2 3052 support 4G/5G
	M.2 M-Key	1 x M.2 2280 SATA 3.0
	SATA	1 x SATA3.0 (optional)
	Internal USB2.0	2 x Internal USB2.0 (Pin out), 1 x Internal USB Type-A
	SIM	1 x Nano SIM
LED	LED Lights	Power status, HDD R/W,USER1,USER2
Power	Supply Voltage	DC 9-36V ± 10%
	Max. Consumption	30 W
	Power Management	AT/ATX
Others	Watch Dog	Timer Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds
	TPM	TPM 2.0 (optional)
Environment	Operational Temperature	0~ 60° C (32~140°F)
	Storage Temperature	-40° C ~ 85° C (-40~185°F)
	Relative Humidity (Operating)	95% @ 40 °C (non-condensing)
	Relative Humidity (Storage)	95% @ 60 °C (non-condensing)
Physical Characteristics	Dimensions	172 x 125 x 62.5mm(L x W x H)
	Installation	Wall-mounting/Back-mounting/Din Rail
Certification	EMC	CE, FCC
OS Support	OS Support	Windows 10/11, centos 8, ubuntu 20.04/22.04

Dimensions

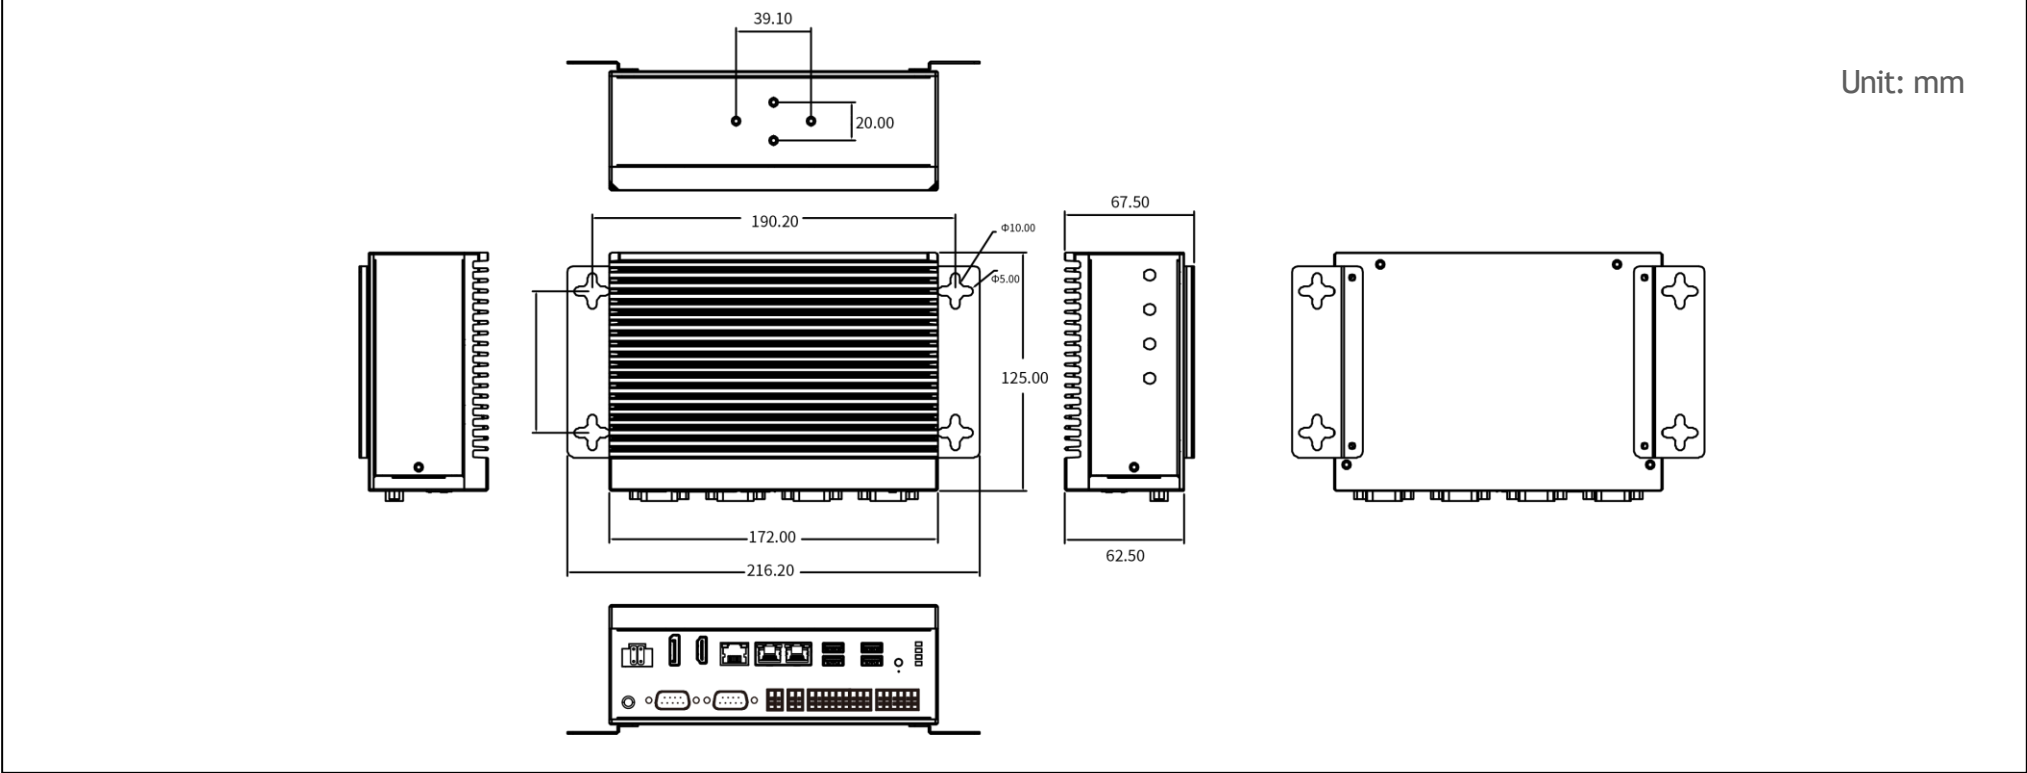

Interface

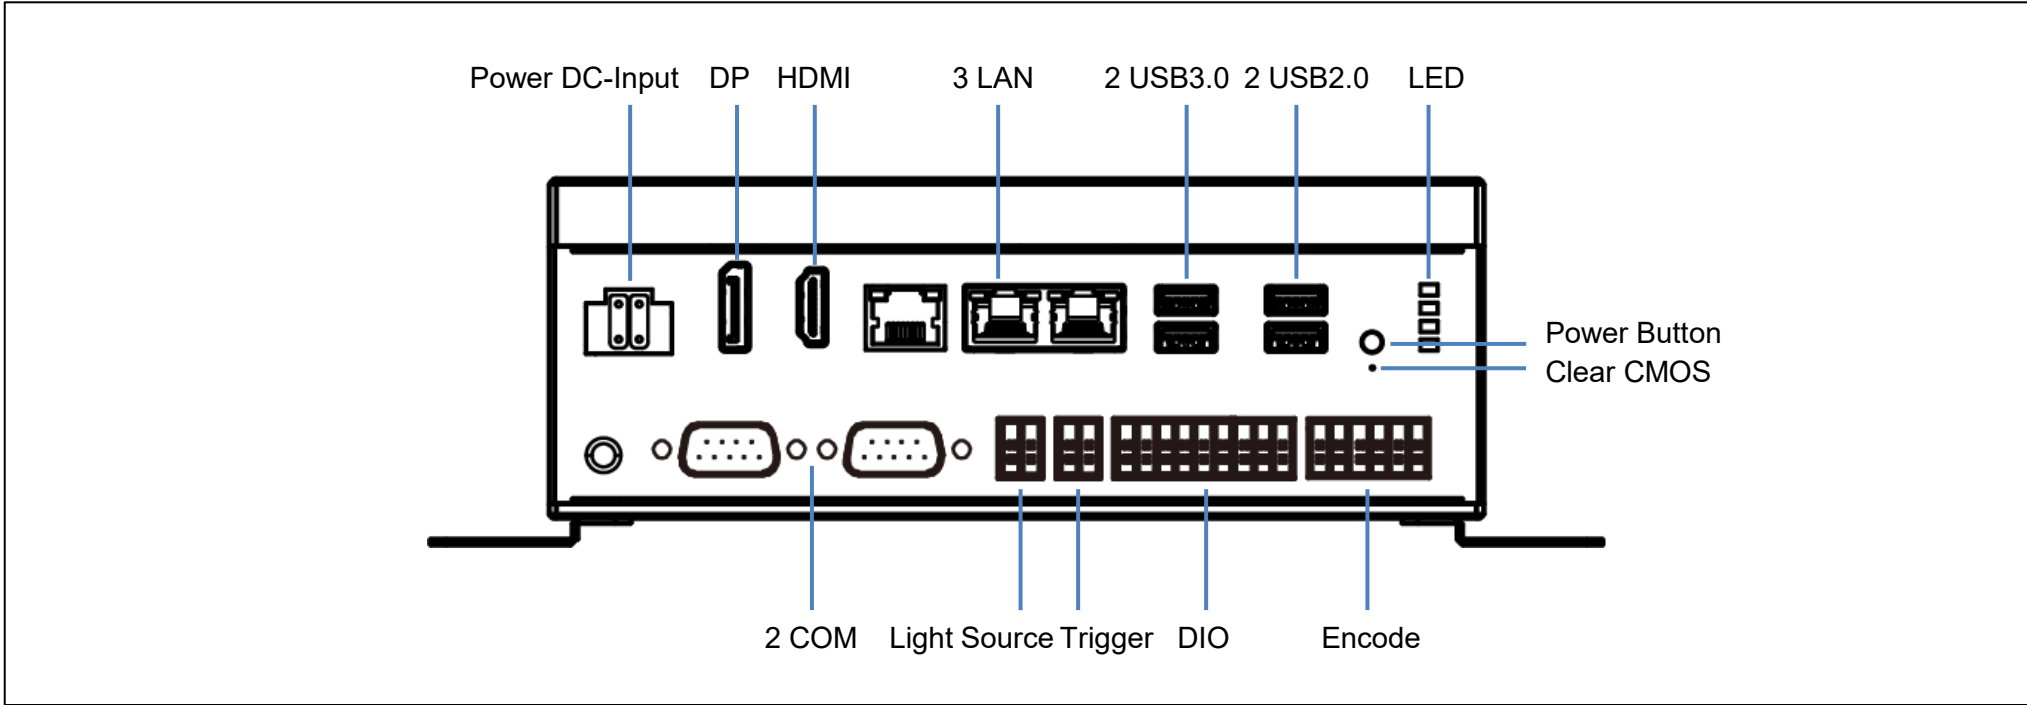

Ordering Information

Part Number	CPU	TDP	Max. Frequency	Core	Thread	LAN	USB 3.0	USB 2.0	COM	Light Source	Trigger	DI	DO	Encode	UPS	4G/5G	Wi-Fi
E213-01	Celeron-J6412	6.5W	2.60 GHz	4	4	3	2	2	2	2	2	8	8	2	Optional	Optional	Optional
E213-02	Celeron-N6210	6.5W	3.00 GHz	2	2	3	2	2	2	2	2	8	8	2	Optional	Optional	Optional
E213-03	X6425E	12W	3.00 GHz	4	4	3	2	2	2	2	2	8	8	2	Optional	Optional	Optional