

E723 Series


Product Features

- Intel® Alder Lake-N N97/ i3-N305
- Single channel DDR4 up to 16GB
- Dual independent display via DP and HDMI
- 3 LAN (2 x Intel i210 support PoE , 1 x Intel Realtek RTL8111H)
- 1 RS-232/422/485, 1 RS-232
- 3 USB 3.0, 1 USB 2.0
- 2 Trigger, 2 Light Source
- 8 DI, 8 DO, 2 Encoder
- Support 4G/5G, Wi-Fi module expansion
- DC 9-36V, UPS module is optional
- 180 x 165 x 67mm (L x W x H), support Wall-mounting/ Back-mounting/ Din Rail installation
- Modular and cable-free design
- CE/FCC Class B, ESD 8KV/15KV
- Windows 10/11, centos 8, ubuntu 20.04/22.04


Specification

	Item	Description
Processor System	CPU	Intel® Alder Lake-N series N97/ i3-N305
	TDP	15W MAX
	BIOS	AMI 128Mbit SPI Flash
Memory	Technology	DDR4 SO-DIMM
	Max Capacity	16GB
Graphics	Controller	Intel Gen12 UHD Graphics Engines (SoC integrated)
	Feature	DX12, Open GL 4.6, Vulkan 1.2
External I/O	DP	1 x DP1.4a resolution up to 4096 x 2304@60 Hz
	HDMI	1 x HDMI2.0b resolution up to 4Kx2K@60Hz
	Ethernet	2 x Intel i210 GbE LAN (Support PoE), 1 x Realtek RTL8111H GbE LAN
	USB	1 x USB2.0, 3 x USB3.0
	Trigger	2
	Light Source	2
	Serial Port	COM1: RS-232/422/485, COM2: RS-232
	Encoder	2
	DIO	8 x DI, 8 x DO
	Power Connector	4 PIN Phoenix terminal, support remote switch
LED & Switch	LED Indicator	Power, SATA, User defined 1, User defined 2
	Power Button	1 x Power Button
	Clear CMOS Button	1 x Clear CMOS Button
Internal Connectors	M.2 B-Key	1 x M.2 B-Key 3042/3052 support 4G/5G
	M.2 E-Key	1 x M.2 E-Key 2230 support WIFI (CNVI protocol)
	M.2 B-Key	1 x M.2 B-Key 2280 Sata3.0
	USB 2.0	1 x internal USB 2.0 (PIN-Out), 1 x internal USB Type-A
	SIM	1 x Nano SIM
Power Supply	Power Input	DC 9~36V ±10%
	Power management	AT/ATX
	Max. consumption	60W
Others	Watchdog	Interrupt, system reset, programmable1~255 min/sec
	TPM	TPM 2.0 (Optional)
Physical Characteristics	Dimension	180 x 165 x 67mm (L x W x H)
	Weight	2.0 kg
	Installation	Wall-mounting/ Back-mounting/ Din Rail
Environment	Operating Temperature	0 ~ 60 °C (32~140°F)
	Storage Temperature	-40° C ~ 85° C (-40~185°F)
	Operating Humidity	95% @ 40 °C (Non-condensing)
	Storage Humidity	95% @ 60 °C (Non-condensing)
Certification	EMC	CE, FCC
Operation System	OS	Windows 10/11, centos 8, ubuntu 20.04/22.04

Dimension

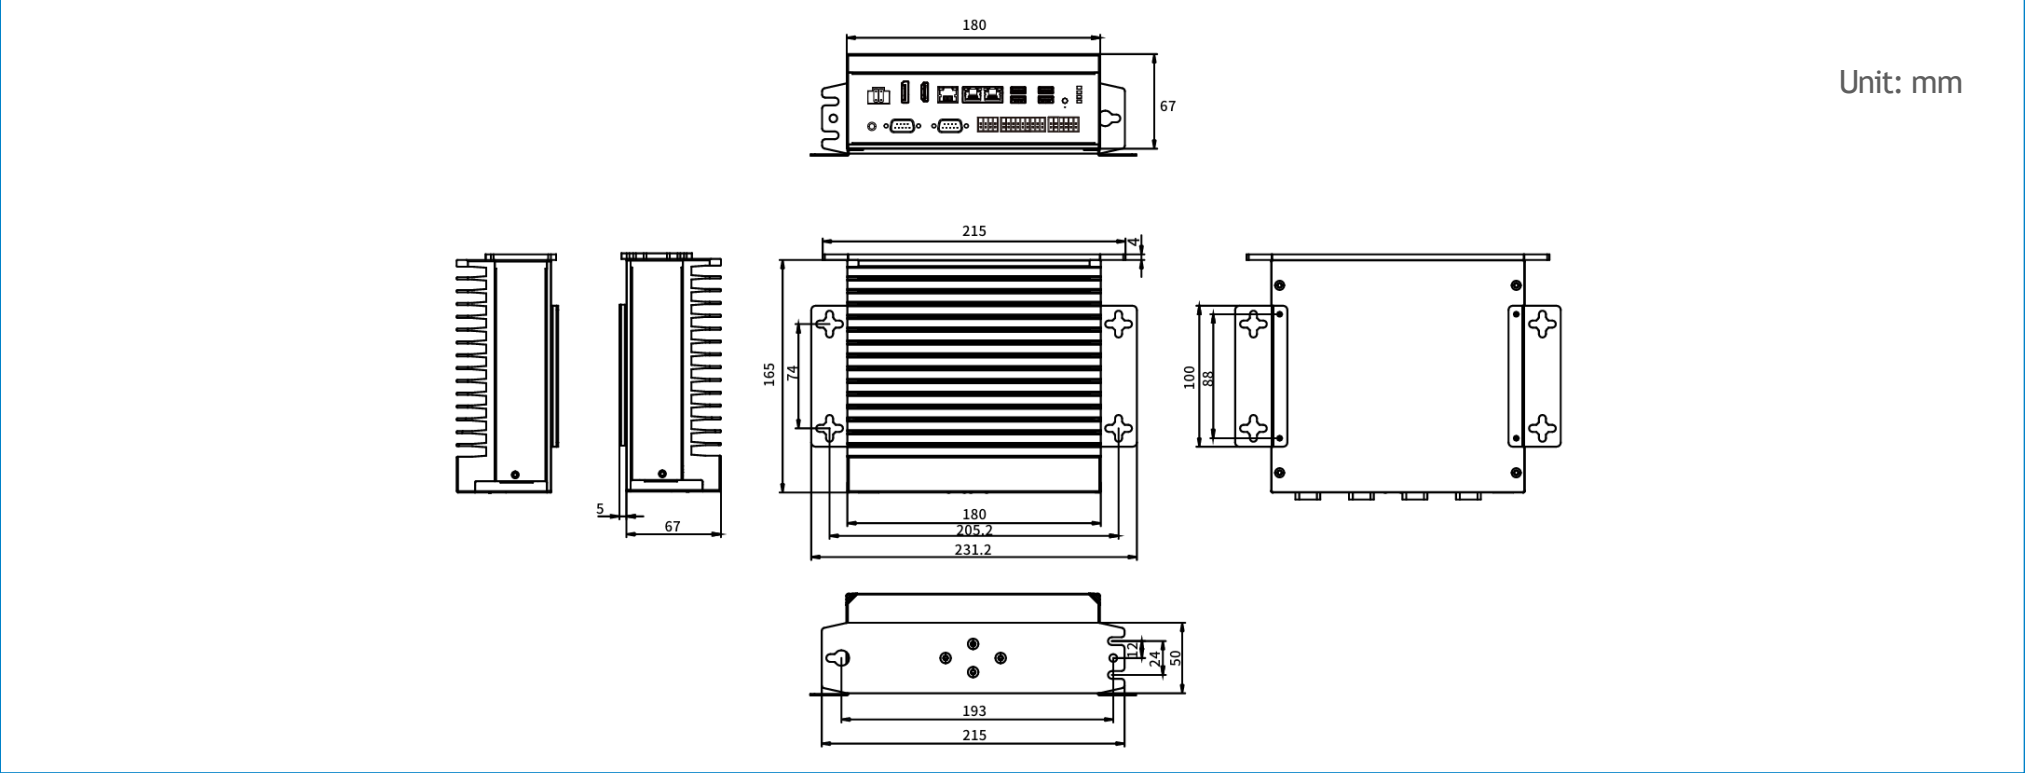

Interface

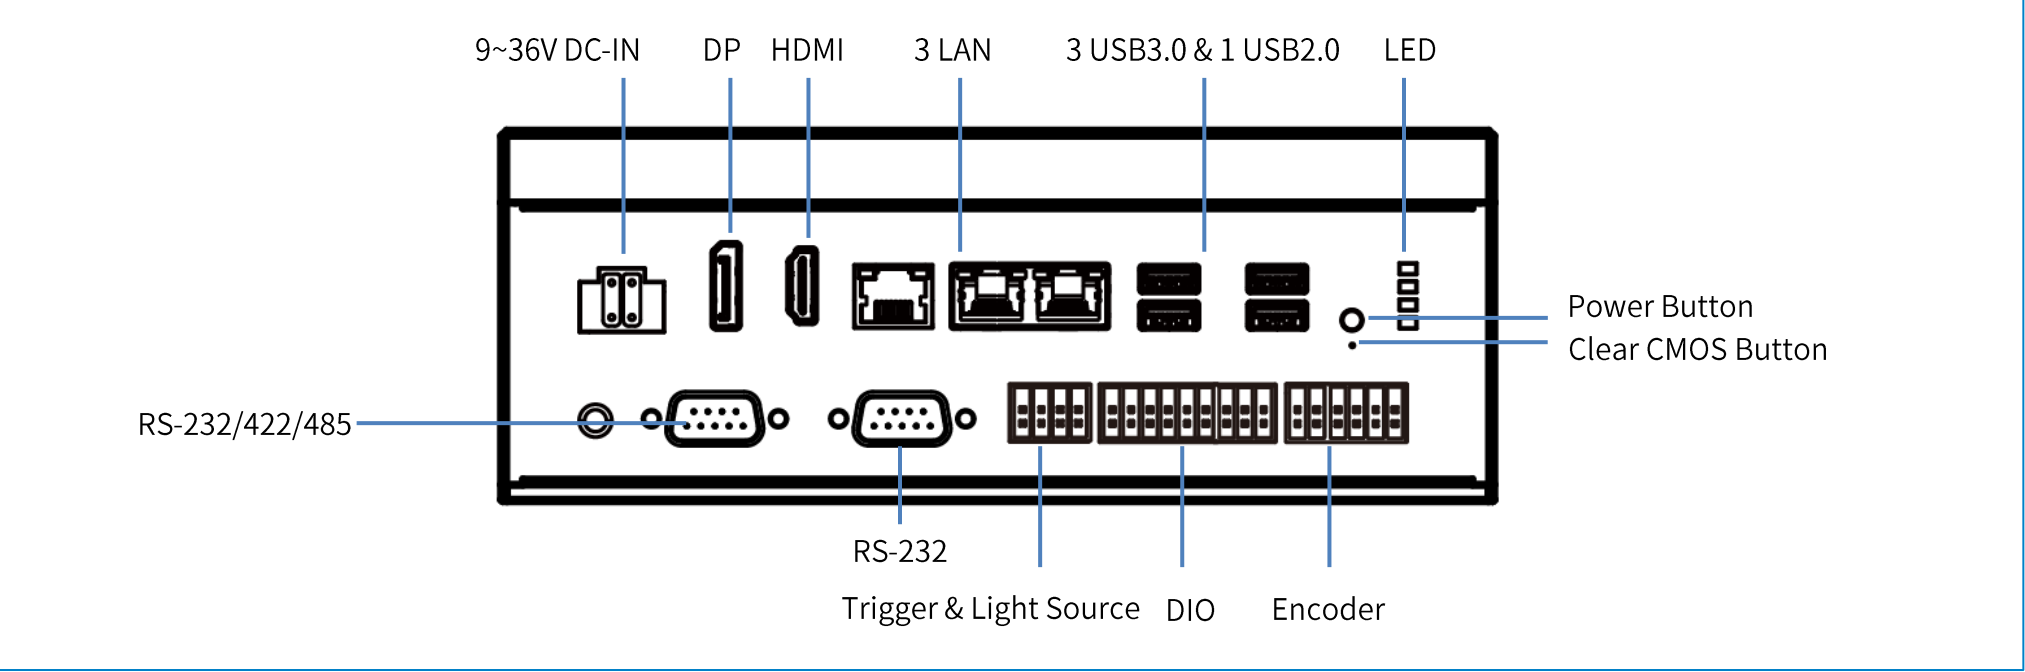

Ordering Information

Model	CPU	Turbo Frequency	TDP	Core/Thread	LAN	COM	USB3.0	USB2.0	Trigger	Light Source	DI/DO	Encoder	DP	HDMI	Power Input
E723-02	N97	3.60 GHz	12W	4C	3	2	3	1	2	2	8/8	2	1	1	9~36V DC
E723-04	i3-N305	3.80 GHz	15W	8C/8T	3	2	3	1	2	2	8/8	2	1	1	9~36V DC

Optional Accessories

Part Number	Description
MF0A000000000057	WIFI+BT module, M.2 2230 CNVi WiFi5 2.4G/5G 2x2 9560
MF0A000000000078	WIFI+BT module, M.2 2230 CNVi WiFi6 2.4G/5G 2x2
MF0A000000000016	5G module, M.2 RM500Q-GL Sub-6 GHz Worldwide (Excluding US)
MF0A000000000042	5G LTE module, M.2 RM520NGLAA-M20-SGASA, Worldwide
MF0A000000000036	4G LTE module, M.2 EM05CEFC-128-SGAS, China
MF0A000000000066	5G LTE module, M.2 RM500UCNVAA-D10-SNADA EMEA, Asia-Pacific
82UPS000000000002	Internal UPS module
-	Din Rail Clip

OS Support

Part Number	Description
AA0A000000000002	Win10 IoT Ent 2019 LTSC Entry OEM
AA0A000000000003	Win10 IoT Ent 2019 LTSC MultiLang ESD OEI High End
AA0A000000000004	Win10 IoT Ent 2019 LTSC MultiLang ESD OEI Value
AA0A000000000005	Win10 IoT Ent 2021 LTSC Multilang ESD OEI Entry
A087	Win 11
A088	centos 8
A049	ubuntu 20.04 (E223)
A053	ubuntu 22.04 (E223)

Packing List

Part Number	Description	Quantity
-	E723 Series Industrial PC	1
KE0A000000000004	Round head screws	6
ZM0A000000000020	Three-plug power cord	1
ZM0A000000000058	power adapter with 4 PIN terminal	1
MC0A000000000019	Wall-mounting kits (100*37*1mm)	1

E723 Series


Product Features

- Intel® Alder Lake-N N97/ i3-N305
- Single channel DDR5 up to 16GB
- Dual independent display via DP and HDMI
- 3 LAN (2 x Intel i210 support PoE , 1 x Intel Realtek RTL8111H)
- 1 RS-232/422/485, 1 RS-232
- 3 USB 3.0, 1 USB 2.0
- 2 Trigger, 2 Light Source
- 8 DI, 8 DO, 2 Encoder
- Support 4G/5G, Wi-Fi module expansion
- DC 9-36V, UPS module is optional
- 180 x 165 x 67mm (L x W x H), support Wall-mounting/ Back-mounting/ Din Rail installation
- Modular and cable-free design
- CE/FCC Class B, ESD 8KV/15KV
- Windows 10/11, centos 8, ubuntu 20.04/22.04


Specification

	Item	Description
Processor System	CPU	Intel® Alder Lake-N series N97/ i3-N305
	TDP	15W MAX
	BIOS	AMI 128Mbit SPI Flash
Memory	Technology	DDR5 SO-DIMM
	Max Capacity	16GB
Graphics	Controller	Intel Gen12 UHD Graphics Engines (SoC integrated)
	Feature	DX12, Open GL 4.6, Vulkan 1.2
External I/O	DP	1 x DP1.4a resolution up to 4096 x 2304@60 Hz
	HDMI	1 x HDMI2.0b resolution up to 4Kx2K@60Hz
	Ethernet	2 x Intel i210 GbE LAN (Support PoE), 1 x Realtek RTL8111H GbE LAN
	USB	1 x USB2.0, 3 x USB3.0
	Trigger	2
	Light Source	2
	Serial Port	COM1: RS-232/422/485, COM2: RS-232
	Encoder	2
	DIO	8 x DI, 8 x DO
	Power Connector	4 PIN Phoenix terminal, support remote switch
LED & Switch	LED Indicator	Power, SATA, User defined 1, User defined 2
	Power Button	1 x Power Button
	Clear CMOS Button	1 x Clear CMOS Button
Internal Connectors	M.2 B-Key	1 x M.2 B-Key 3042/3052 support 4G/5G
	M.2 E-Key	1 x M.2 E-Key 2230 support WIFI (CNVI protocol)
	M.2 B-Key	1 x M.2 B-Key 2280 Sata3.0
	USB 2.0	1 x internal USB 2.0 (PIN-Out), 1 x internal USB Type-A
	SIM	1 x Nano SIM
Power Supply	Power Input	DC 9~36V ±10%
	Power management	AT/ATX
	Max. consumption	60W
Others	Watchdog	Interrupt, system reset, programmable1~255 min/sec
	TPM	TPM 2.0 (Optional)
Physical Characteristics	Dimension	180 x 165 x 67mm (L x W x H)
	Weight	2.0 kg
	Installation	Wall-mounting/ Back-mounting/ Din Rail
Environment	Operating Temperature	0 ~ 60 °C (32~140°F)
	Storage Temperature	-40° C ~ 85° C (-40~185°F)
	Operating Humidity	95% @ 40 °C (Non-condensing)
	Storage Humidity	95% @ 60 °C (Non-condensing)
Certification	EMC	CE, FCC
Operation System	OS	Windows 10/11, centos 8, ubuntu 20.04/22.04

Dimension

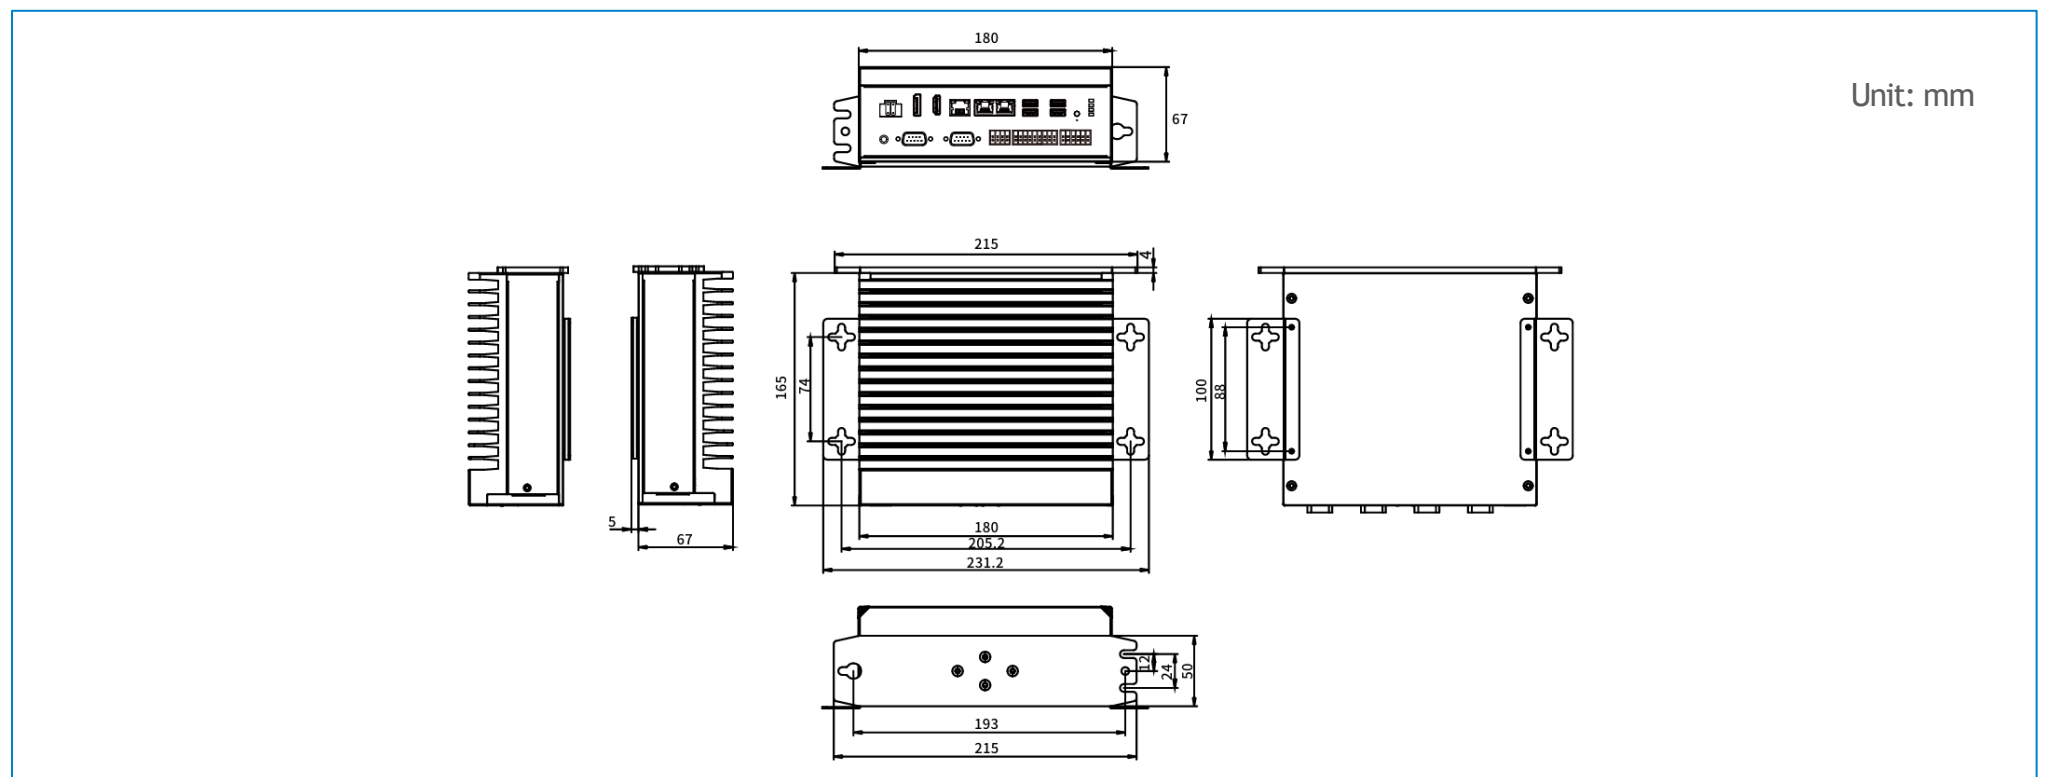

Interface

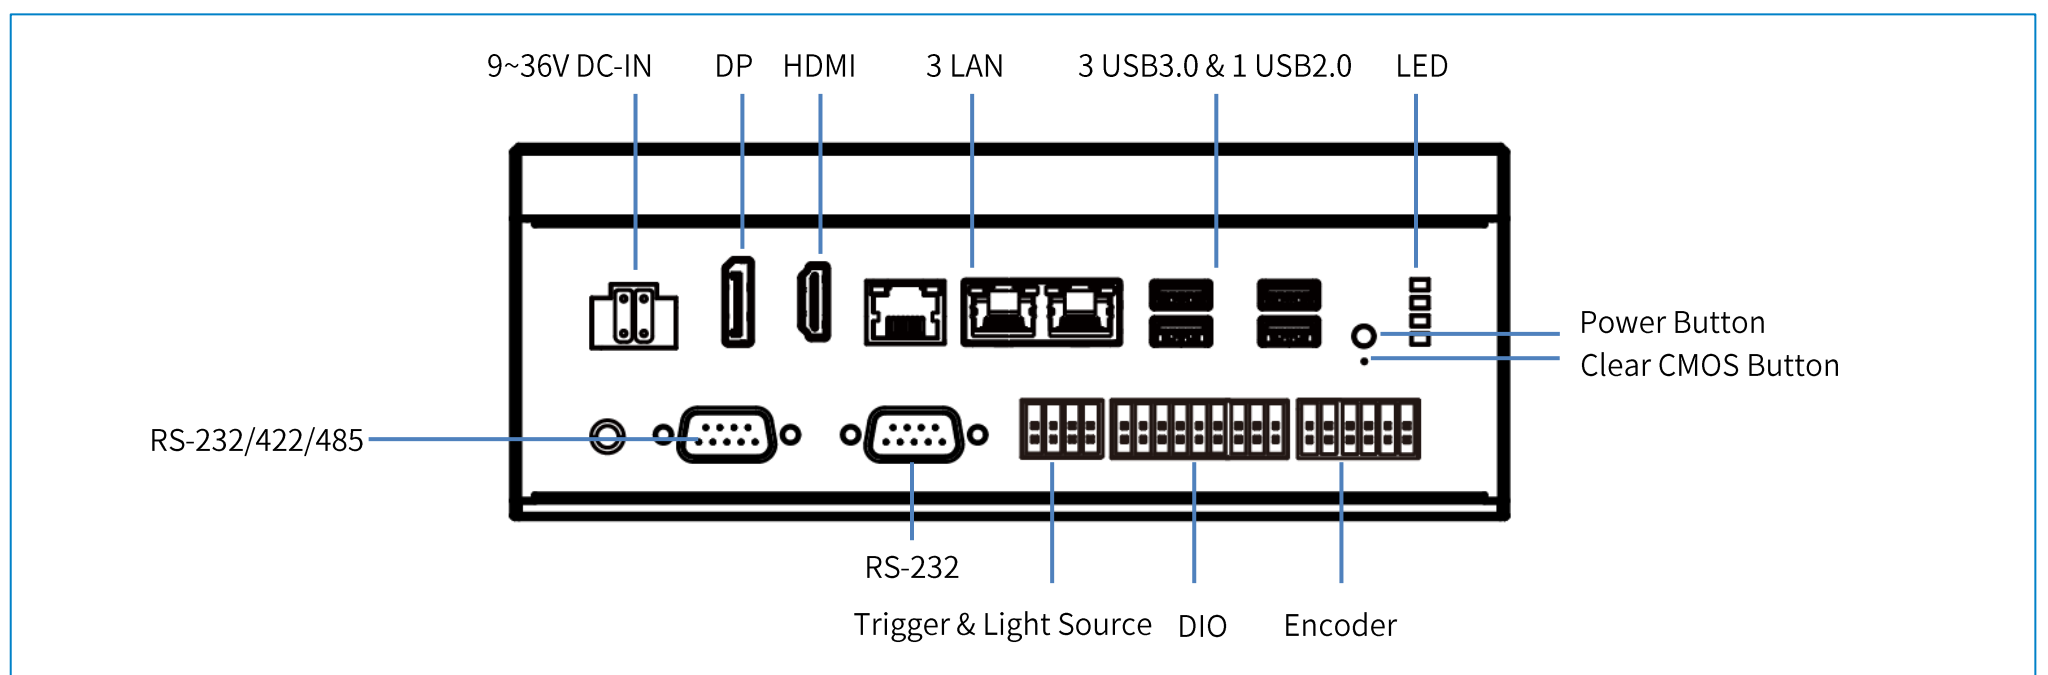

Ordering Information

Model	CPU	Turbo Frequency	TDP	Core/Thread	LAN	COM	USB3.0	USB2.0	Trigger	Light Source	DI/DO	Encoder	DP	HDMI	Power Input
E723-02	N97	3.60 GHz	12W	4C	3	2	3	1	2	2	8/8	2	1	1	9~36V DC
E723-04	i3-N305	3.80 GHz	15W	8C/8T	3	2	3	1	2	2	8/8	2	1	1	9~36V DC

Optional Accessories

Part Number	Description
MF0A000000000057	WIFI+BT module, M.2 2230 CNVi WiFi5 2.4G/5G 2x2 9560
MF0A000000000078	WIFI+BT module, M.2 2230 CNVi WiFi6 2.4G/5G 2x2
MF0A000000000016	5G module, M.2 RM500Q-GL Sub-6 GHz Worldwide (Excluding US)
MF0A000000000042	5G LTE module, M.2 RM520NGLAA-M20-SGASA, Worldwide
MF0A000000000036	4G LTE module, M.2 EM05CEFC-128-SGAS, China
MF0A000000000066	5G LTE module, M.2 RM500UCNVAA-D10-SNADA EMEA, Asia-Pacific
82UPS00000000002	Internal UPS module
-	Din Rail Clip

OS Support

Part Number	Description
AA0A000000000002	Win10 IoT Ent 2019 LTSC Entry OEM
AA0A000000000003	Win10 IoT Ent 2019 LTSC MultiLang ESD OEI High End
AA0A000000000004	Win10 IoT Ent 2019 LTSC MultiLang ESD OEI Value
AA0A000000000005	Win10 IoT Ent 2021 LTSC Multilang ESD OEI Entry
A087	Win 11
A088	centos 8
A049	ubuntu 20.04 (E223)
A053	ubuntu 22.04 (E223)

Packing List

Part Number	Description	Quantity
-	E723 Series Industrial PC	1
KE0A0000000000004	Round head screws	6
ZM0A0000000000020	Three-plug power cord	1
ZM0A0000000000058	power adapter with 4 PIN terminal	1
MC0A0000000000019	Wall-mounting kits (100*37*1mm)	1